

Automatic winding
Autoconer 338, 5, X5, 6, X6

RIETER

Smart Splice Technology

Expanding the application range and flexibility

Customer benefits:

- High flexibility for a wide application range
- Improving the splice quality
- Easy installation with plug and play



Smart Splice Technology

Increasing splice strength and flexibility

With the Smartsplicer family, the Autoconer X6 sets the benchmark for easy handling and impressive quality in every application. The smart functions reduce the operator's workload and automatically ensure top splicing quality.

Higher splice strength for coarse CO based yarns

The injection splicer is beneficial especially for coarse yarn count range. Using a very small amount of water helps achieve a yarn-like appearance and a higher splice strength for efficient and profitable downstream processing, such as cotton, compact or denim yarns.

Intelligence inside


With just a few clicks, the operator can set all splicing parameters centrally. The intelligent autocalibration of the splicer feeder arm ensures the splicing quality. Preconfigured, optimally adapted splicing components in the winding unit minimize the setup effort.

Thermosplicer for wool applications


For special applications, splicing with slightly heated splice air is the better solution compared to standard splicing. Especially for wool and technical yarns, a Thermosplicer is needed. The Thermosplicer is also available as a conversion. The splicer comes ready for use and with ceramic shears as standard.

Additional splice heads – no loss in production

Maintenance on the splice head can result in downtime of the production. To prevent this, customers can get additional splice heads. Installation is made easy, they can be exchanged via plug and play with the splice heads installed in the machine to ensure production. Only one screw must be unscrewed for this purpose. Additional splice heads are available for all machine generations from Autoconer 338 to Autoconer X6.

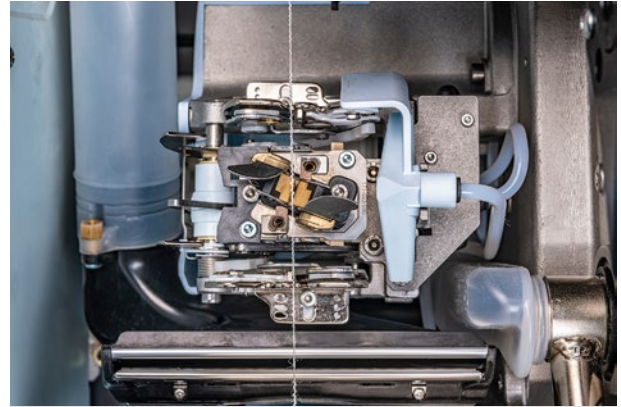

Winding unit Autoconer X6 including injection splicer

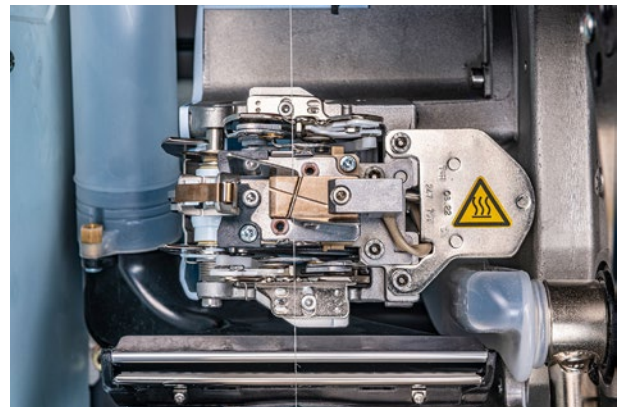

Winding unit Autoconer X6 including Thermosplicer

Order numbers	Standard to injection splicing	Standard to thermo splicing	Additional splice head
AC 338	148-400.702	148-400.705	no longer available
AC 5	149-400.005	149-400.036	149-400.002
AC X5	149-400.117	149-400.036	149-400.002
AC 6	159-400.006	159-400.009	159-400.005
AC X6	171-400.015	171-400.026	171-400.108

Rieter Machine Works Ltd.
Klosterstrasse 20
CH-8406 Winterthur
T +41 52 208 7171
F +41 52 208 7283
aftersales@rieter.com

Rieter India Private Ltd.
Gat No. 768/2, Village Wing
Shindewadi-Bhor Road
Taluka Khandala, District Satara
IN-Maharashtra 412 801
T +91 2169 664 141
F +91 2169 664 226

**Rieter (China) Textile
Instruments Co., Ltd.**
390 West Hehai Road
Changzhou 213022, Jiangsu
P.R. China
T +86 519 8511 0675
F +86 519 8511 0673

The data and illustrations in this brochure and on the corresponding data carrier refer to the date of printing. Rieter reserves the right to make any necessary changes at any time and without special notice. Rieter systems and Rieter innovations are protected by patents.

3661-v1 en 2401