

Compact spinning
COMPACTapron

RIETER

COMPACTapron Advanced

The next generation of lattice
apron compacting technology

COMPACTapron Advanced

3D COMPACT technology with the best tenacity values and newly designed compact zone geometry for optimized yarn values

With COMPACTapron Advanced, SUESSEN marks a new milestone in compacting technology. This next generation of lattice apron compacting technology displays unbeatable values: a higher tenacity with an additional 0.5 to 1 cN/tex*, up to 20% lower IPIs*, up to 60% energy savings for compacting or up to 10% lower conversion cost*. The newly designed Advanced hairiness package provides maximum flexibility, featuring interchangeable inserts with different slot types for a wider count and material range.

OUTSTANDING ADVANTAGES

Unmatched yarn tenacity

COMPACTapron Advanced achieves higher values with an additional 0.5 to 1 cN/tex*

3D COMPACT

Transport of the fibers in the condensing zone over the suction slot at a distinctive distance to the mesh apron so that all fibers are compacted

Highest flexibility

Interchangeable inserts for a wider count and material range.


Fast plug in/out ability to switch between conventional and compact spinning

Low conversion cost

Due to low energy, maintenance and spare parts requirements

Insensitive to spinning geometry and free yarn length

Available for many machine types and most common materials

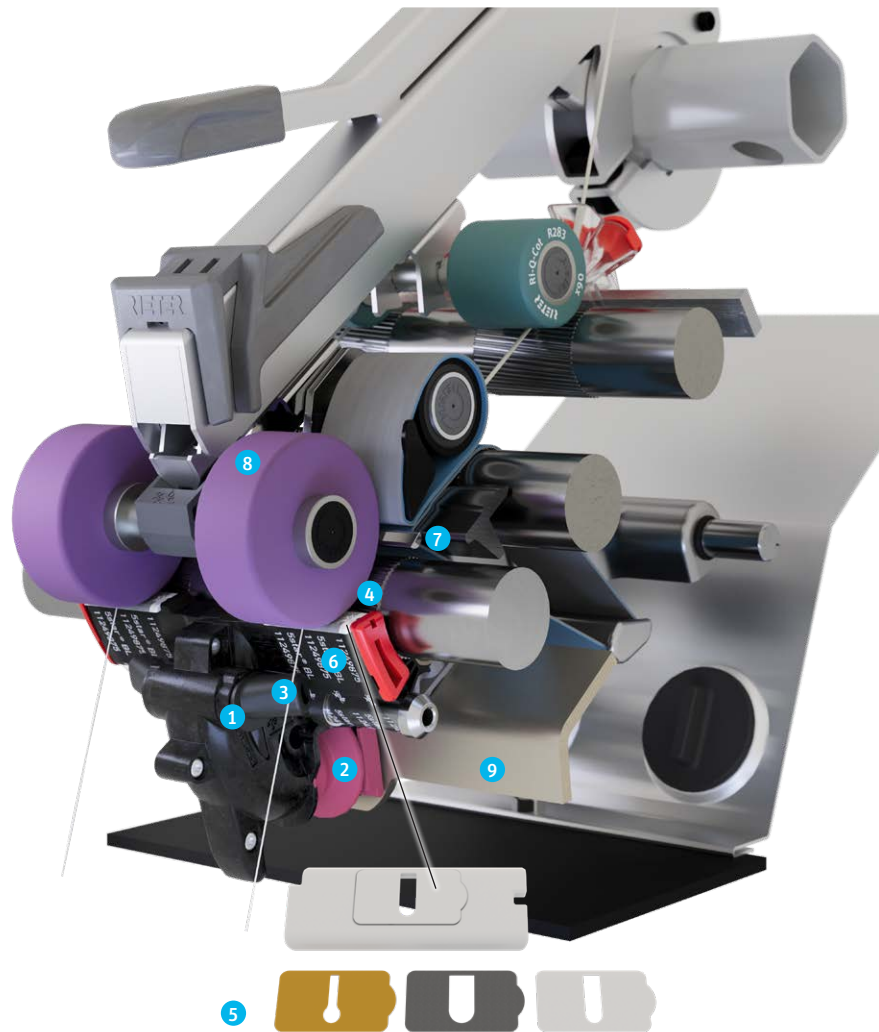

1. COMPACTapron Advanced unit
2. Negative pressure supply
3. Pneumafil (yarn break) suction
4. Compacting area with slots
5. Interchangeable inserts
6. Lattice apron
7. New designed PINSpacer Advanced
8. COMPACTapron roller
9. Steel rail

*compared to EliTe system

Rieter Ltd.
Klosterstrasse 20
CH-8406 Winterthur
T +41 52 208 7171
aftersales@rieter.com

Rieter India Private Ltd.
Gat No. 768/2, Village Wing
Shindewadi-Bhor Road
Taluka Khandala, District Satara
IN-Maharashtra 412 801
T +91 2169 664 141

**Rieter (China) Textile
Instruments Co., Ltd.**
390 West Hehai Road
Changzhou 213022, Jiangsu
P.R. China
T +86 519 8511 0675

The data and illustrations in this brochure and on the corresponding data carrier refer to the date of printing. Rieter reserves the right to make any necessary changes at any time and without special notice. Rieter systems and Rieter innovations are protected by patents.

3501-v4 en 2605